




**Eco-Smart, Inc.**

TOLL FREE: (888)329-2705 FAX: (941)377-9460 [info@eco-smart.com](mailto:info@eco-smart.com)

# Rollout Runway 7619

Rollout Runway 7619 is a prefabricated, resilient, recycled rubber pad engineered to provide temporary protection from running track surfaces. Roll it out over an existing runway or track surface to protect the surface from cleats, spikes, motorized vehicles, and foot traffic. When the event has ended, simply re-roll it for easy storage. Manufactured in four widths and custom roll lengths, Rollout Runway 7619 becomes a quick and effective way to protect your athletic surface.

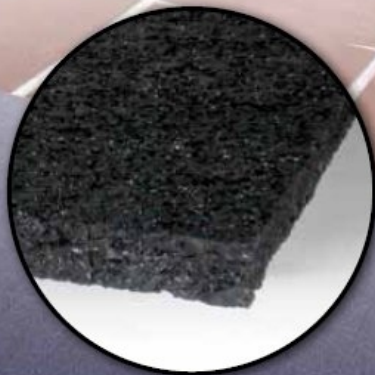

## Product Benefits:

- Extremely durable and spike resistant
- Provides shock absorption for training and competition
- Can be loose laid or adhered over asphalt or concrete for temporary protection of a surface
- Portable (re-roll for easy storage)
- Available in four widths and two thicknesses
- Continuous rolls from 30 to 300 feet
- Suitable for indoor and outdoor use
- Made in the U.S.A. from the highest quality recycled rubber

Manufactured in the U.S.A. by:  
**ecore**  
INTERNATIONAL



**Eco-Smart, Inc.**

TOLL FREE: (888)329-2705 FAX: (941)377-9460 [info@eco-smart.com](mailto:info@eco-smart.com)

## Physical Data

	ASTM	Rollout Runway-7619	
Density	D297	47 lbs./ft <sup>3</sup> min.	
Tensile Strength	D412, Die C	116 psi min.	
Elongation	D412, Die C	74% min.	
Compression/Recovery	F36	<b>Compression</b>	<b>Recovery</b>
@50 psi		15%	81%
@100 psi		28%	92%
@200 psi		45%	95%
Flexibility	F147	0 – 1 Factor	
Compression Set B	D395	26% Max	
25% deflection, 22 hrs. @ 158° F			
Compression Set (Foam)	D3676	19% Max	
50% deflection, 22 hrs. @ 158° F			
Temperature Stability		-40° to +115°C (-40° to +240° F)	
Post Consumer Recycled Content		93%	

## Product Dimensions

### 7619 Rolls



32≤, 36≤, 42≤, 48≤ width  
32≤, 36≤, 42≤, 48≤ width

### Thickness

10 mm (0.39≤)  
12 mm (0.47≤)

### Weight (lbs./ft<sup>2</sup>)

1.5  
1.8

Above test data has been taken from original manufactured product in our laboratory. However, due to normal differences in calibration and lab equipment, slight variations may occur when tested in the field.

## Technical Information



**Installation:** Rollout Runway 7619 can be loose laid over asphalt, concrete, all-weather tracks and indoor hard surfaces for a temporary runway or protective surface. Rolls are factory-cut to job specified lengths to reduce scrap and minimize installation handling and time. Seams are to be butt-joined along all joints. Please contact the factory for detailed instructions on temporary installation of this product for indoor and outdoor use.

**Warranty:** All Rollout Runway 7619 is guaranteed by ECORE International™ to be free from manufacturing defects on both material and workmanship. If such a defect is discovered, the customer must notify ECORE either through the contracting installer, distributor or directly. If found to be defective within three years under normal non-abusive conditions, the sole remedy against the seller will be the replacement or repair of the defective goods, or at the seller's option, credit may be issued not exceeding the selling price of the defective goods.

**Please Note:** Rollout Runway is not intended to be used as a permanent finished floor. Rollout Runway is treated as a temporary surface covering. ECORE International is committed to sustainable manufacturing practices and the reuse of manufacturing by products whenever possible to eliminate our waste stream. Because Rollout Runway is not intended as permanent flooring, but a protective cover ECORE re-utilizes first quality manufacturing excess as part of the formula for this product. One possible ingredient that is reused is colored EPDM which may lead to visual irregularities, but do not affect the performance of the material in any manner. If looking for a floor finish in solid black, please visit [www.Eco-Smart.com](http://www.Eco-Smart.com).